
INSTALLATION GUIDE

REV 7/19

ITEMS: FP10

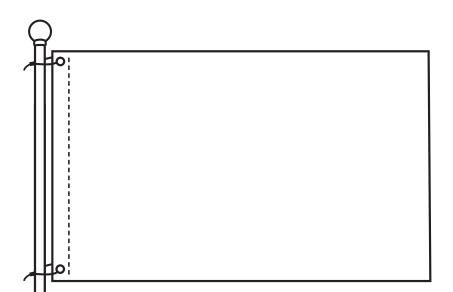

GREAT AMERICAN'S BUDGET ALUMINUM FLAGPOLES:

- ★ Assemble in minutes
- ★ No cement required
- ★ Excellent value for tight budgets

10' Aluminum Flagpole

Budget Aluminum Flagpole FP10


Parts Include:

- A. 2 Pole Segments
- B. Fiberglass Stake
- C. 2 Zip Ties
- **D.** Gold Ball Ornament

Optional Tools:

- Rubber Mallet
- Level
- Scissors

Recommended Flag Size(s): 2' x 3', 3' x 5'

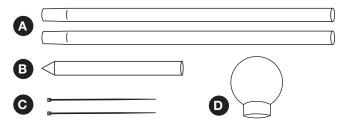


Ground Stake Installation:

Using a rubber mallet, pound the pointed end of the stake (B) into ground until it is halfway under the surface. If possible, as you ease the stake into the ground, use a level to ensure it is completely vertical so your flag will stand up straight and support its' weight in windy conditions.

Installation Tips:

- Make sure to use eye protection when installing fiberglass ground stake.
- Do not drive into rocky ground or hardened soil. If soil is too dry, try soaking the area for a few minutes to soften it.
- Check for sprinkler systems and utility lines when choosing pole location.

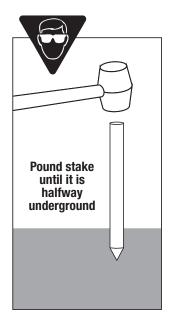

Pole Assembly:

Insert the end of one pole segment (A) into the other segment. Slide ornament on top of pole. (Note: If ornament is not completely round, soak in warm water for a short time.)

Secure the flag by loosely slipping a zip tie (C) through each grommet and around the pole. Starting from the top, tighten zip ties and trim ends with scissors.

Slide the fully assembled pole with attached flag down onto the stake until it sits flush to the ground.

CAUTION: Remove pole from ground stake to replace flag. DO NOT attempt to climb pole or lean a ladder against it as poles are not designed to support the weight of a person.