


ITEMS: KWR

Wind Rider Flag Kit

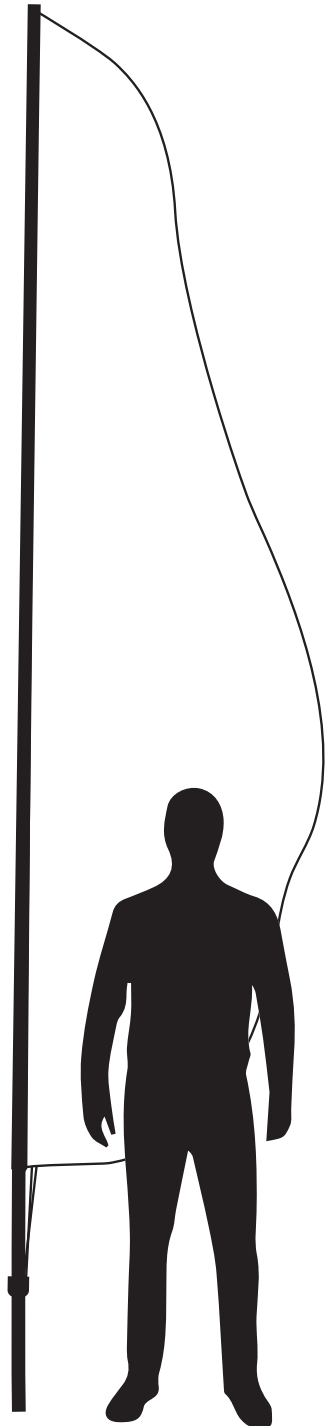


Wind Rider Kits:

- A. 1 Ground Spike
- B. 1 Tapered Pole Segment with Clip
- C. 1 Tapered Pole Segments
- D. 1 Flex Pole Segment
- E. 1 Wind Rider Flag (*Item WR*)


Optional Tools Needed:

- Rubber Mallet or Hammer
- Level

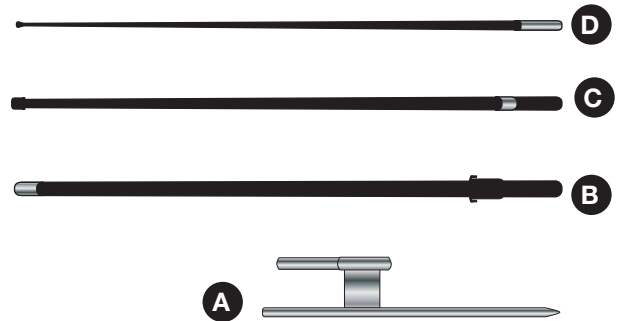

Ground Spike Installation:

Using a rubber mallet or hammer, pound the pointed end of the ground spike into ground until the top edge of the crossbar is flush with the surface. If possible, as you ease the spike into the ground, use a level to ensure it is completely vertical. It is important to make sure that the spike is as vertically level as possible so your flag will stand up straight and support its' weight in windy conditions.

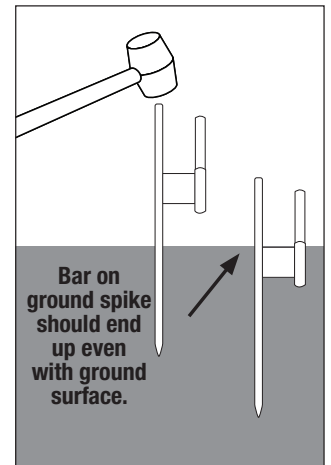

Flagpole Assembly:



1. To assemble the flagpole, start by connecting the bottom segment, the pole with clip (B), and slide the wide end of the pole segment (C) onto the tapered end of pole B until it is tightened securely and doesn't spin around.
2. Finish the pole by sliding the flexible pole (D) into the top of the assembled poles. Make sure that the three pole pieces are secured tightly to each other.
3. Starting at the top end of the pole, slide the flag sleeve down the pole. Tie knot in the bungee strings at the bottom of the flag and secure the base of the flag to the clip at the base of pole B.
4. Slide open hole in the bottom of pole onto the ground spike and you're done!

Note: If you are having problems with your flagpole spinning around and getting twisted, make sure that the pole segments are secured tightly. The tapered ends will allow the top of the pole to spin around and the flag to get tangled if they are not pushed all the way together.

TIP to keep your flags looking fresh: It is recommended that you do not leave your flags out in inclement weather. Slide the pole out of the ground spike to store away and prolong the life of your flag.

GREAT AMERICAN'S WIND RIDER KITS:

- ★ Assembles in minutes!
- ★ Durable for Outdoor Use
- ★ Flag stands 14 feet high

