
ASSEMBLY GUIDE REV 2/22


ITEMS: PAWP102, PAWP103


Single Hoop Dog Jump



Parts Include:


- A. 2 Legs
- **B.** 1 Hoop
- C. 2 Washers
- D. 2 Nut/Bolt SetsAdditional ToolsNeeded: (optional)
- Rubber Mallet
- Auger
- Cement/Fill Dirt

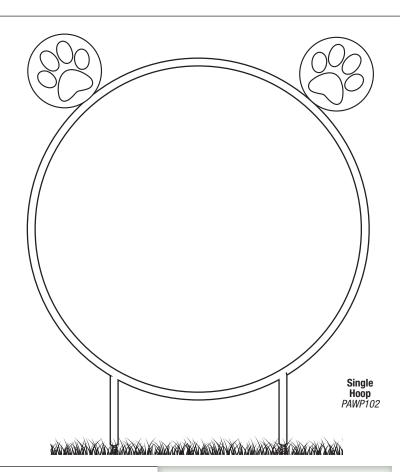



Simple Assembly:

- **1.** Take each of the legs (A) and attach them to the stems in the base of the hoop (B). Slide a washer (C) onto each leg.
- **2.** Gently push the hoop (from the base of the circle) into the ground until you have reached the desired height of the loop (typically 12-18"). The washers should sit on top of the dirt and cover the leg holes. For this installation you do not need the nut/bolt sets (D).

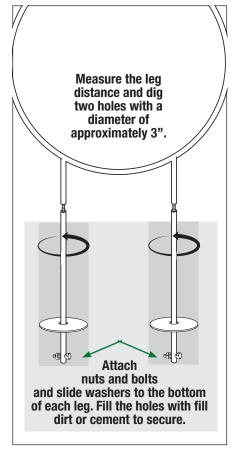

GREAT AMERICAN'S SINGLE HOOP JUMP:

- ★ Powder-coating will not rust
- ★ Includes theft-resistant washers to permanently secure it underground.

Permanent Assembly:

- **1.** Take each of the legs (A) and attach them to the stems in the base of the hoop (B). Slide a washer (C) onto each leg and attach a nut and bolt (D) through the hole at the bottom each leg.
- 2. Measure the distance between the legs and use an auger to dig two columnar holes approximately 3" in diameter. Each hole should be 12-18" deep. Determine the depth by how high you want your hoop to sit above ground.
- **3.** Place your hoop legs into each hole, sliding the washers down to the bottom of each hole. Making sure your hoop is vertically level, fill each hole with fill dirt or cement to permanently secure.

