

ITEMS: PAWP104

**GREAT AMERICAN'S
DOGGIE DASH HOOP:**

- ★ Thermoplastic-coating will not rust
- ★ Accommodates dogs of all sizes


Doggie Dash Hoops

Parts Include:

A. 1 Dash Hoop

Additional Tools Needed: (optional)

- Auger
- Cement/Fill Dirt
- Level

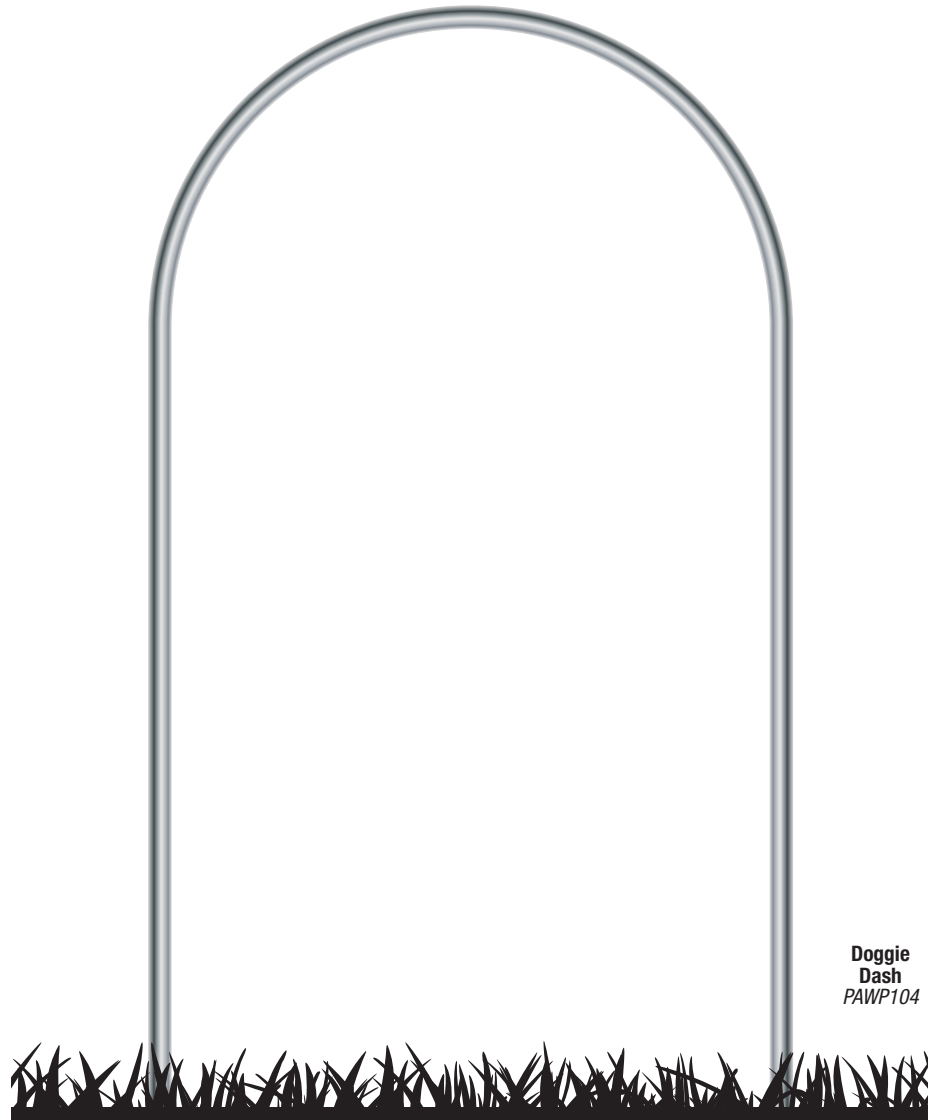

Permanent Installation:

1. Measure the distance between the legs and use an auger to dig two columnar holes approximately 6" in diameter. Each hole should be 12-14" deep. Determine the depth by how high you want your hoop to sit above ground. We recommend that at least 36" is kept above ground to accommodate most dogs.
2. Place hoop (A) legs into each hole. Making sure your hoop is vertically level, fill each hole with fill dirt or cement to permanently secure. If using cement, make sure to allow the recommended setting time before you put your hoops to use.

Note: If installing multiple hoops in a row (like a tunnel), we recommend leaving at least 18" between each hoops to allow larger dogs room to maneuver.

