


Single Hoop Dog Jump


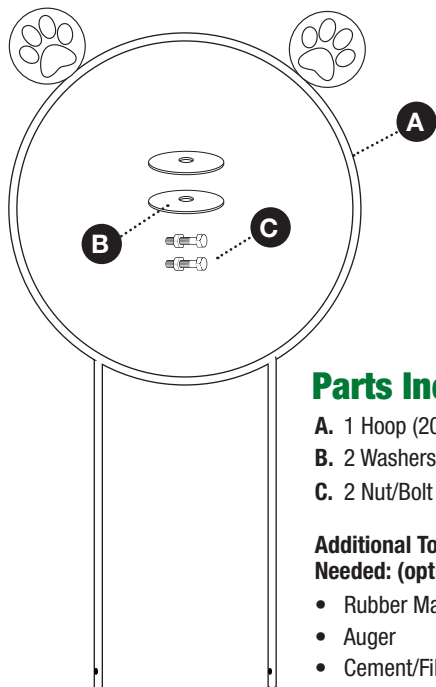


Parts Include:

- A. 1 Hoop (20" or 28")
- B. 2 Washers
- C. 2 Nut/Bolt Sets

Additional Tools Needed: (optional)

- Rubber Mallet
- Auger
- Cement/Fill Dirt

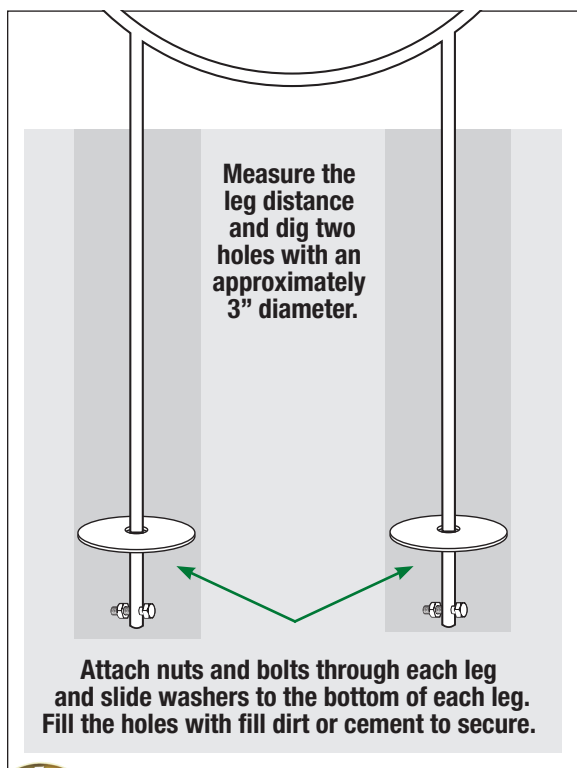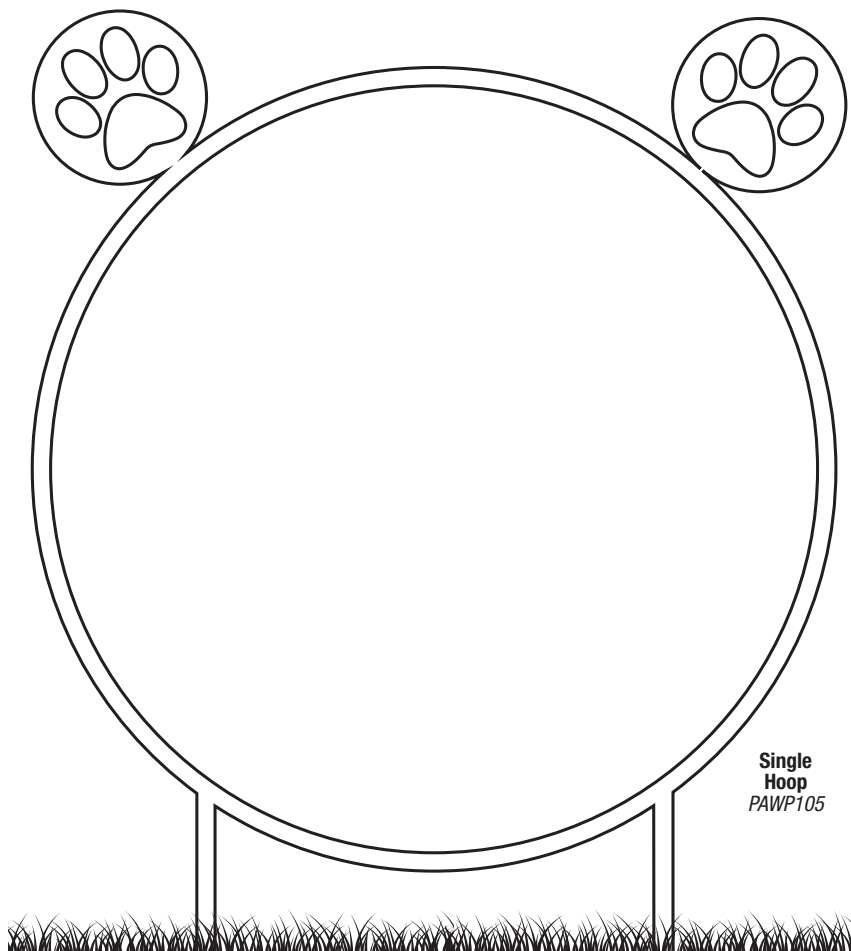

Permanent Assembly:

1. Slide a washer (B) onto each leg and attach a nut and bolt (C) through the hole at the bottom each leg of the hoop (A).
2. Measure the distance between the legs and use an auger to dig two columnar holes approximately 3" in diameter. Each hole should be 15-18" deep. Determine the depth by how high you want your hoop to sit above ground.
3. Place your hoop legs into each hole, sliding the washers down to the bottom of each hole. Making sure your hoop is vertically level, fill each hole with fill dirt or cement to permanently secure.
4. If using cement, follow recommended instructions for curing the cement before using your equipment.

Simple Assembly:

1. It is recommended to wet the area to soften the ground where you want to install the hoop to make it easier to install.
2. Slide a washer (B) onto each leg of the hoop (A). Gently push the hoop (from the base of the circle) into the ground until you have reached the desired height of the loop (typically 12-18"). The washers should sit on top of the dirt and cover the leg holes. For this installation you do not need the nut/bolt sets (C).

GREAT AMERICAN'S SINGLE HOOP JUMP:

- ★ Powder-coating will not rust
- ★ Includes theft-resistant washers to permanently secure it underground.

